

ATX-101B is the platform with a multi-functional structure which is suitable for DeskTop, MiniTower, and Wallmount environments. It can be installed with high-end GPU cards at a depth of 280mm. The storage space can be installed with one 5.25" ODD and one 3.5" FDD or HDD at the front, and one more 3.5" HDD or two 2.5" SSD can be installed at the rear. The main structure of the sheet metal is made of 1.0mm thick SGCC ultra-high-strength patternless metal, product to be the global three-year warranty, welcome customers from all over the world to distribute.


Specification

- * Storage space: 1x 5.25" ODD & 1x 3.5" F/HDD at front, 1x 3.5" HDD or 2x 2.5" SSD at rear
- * The main structure of the sheet metal is made of 1.0mm thick SGCC patternless
- * Four USB 2.0 ports at front bezel
- * Support 1U FlexATX 250W~600W power supply with PFC (max. PSU depth at 150mm)
- * Equipped with removable dust filter & shield at rear panel as standard
- * One intake 120mmx25mm fan at rear (fan part# D12SM-12, CFM @59)
- * Maximum 270mm deep 7 cards installable if one 3.5" HDD installed at rear
- * Maximum 280mm deep 7 cards installable if two 2.5" SSD installed at rear
- * Compatible MB: ATX(12"x9.6"), MicroATX(9.6"x9.6"), Mini-ITX(6.7"x6.7")
- * Compatible with DeskTop, MiniTower, and wall-mounted platform solution
- * Black wallmount kit as option (part# ATX-101B-WALL-BK, one pair)
- * Standard paint: scratch-resistant Black textured paint on surface of chassis
- * Genesys Group chassis with build-in electronics in global 3 years warranty
- * Chassis dimension: D.320 x W.375 x H.160 /mm
- * Accessory: various screw x38, #6 MB copper stand-off x3
- * Package: NW 5 KGM, GW 7 KGM, 1.97 CUFT (carton size at 51x45.5x24cm)

Ordering Information

Model#: ATX-101B, Black ATX desktop-minitower-wallmount chassis

- Option A: ATX-101B-WALL-BK, Black wallmount kit (one pair, 1.6mm thickness, NW at 0.30KG)
- Option B-1: ENP-7025B, 1U FlexATX 250W power supply with PFC (psu size at W.81.5 x H.40.5 x L.150/mm)
- Option B-2: ENP-7130B, 1U FlexATX 300W power supply with PFC (psu size at W.81.5 x H.40.5 x L.150/mm)
- Option B-3: ENP-7140B, 1U FlexATX 400W power supply with PFC (psu size at W.81.5 x H.40.5 x L.150/mm)
- Option B-4: ENP-7650B, 1U FlexATX 500W power supply with PFC (psu size at W.81.5 x H.40.5 x L.150/mm)
- Option B-5: ENP-7660B, 1U FlexATX 600W power supply with PFC (psu size at W.81.5 x H.40.5 x L.150/mm)
- Option C: RW125-12G-FH, 1 Full Height expansion slot space to 1x2.5" HotSwap Cage SATA/SAS 12G
- Option D-1: RW225-M2, 1x3.5" FDD to 2 x M.2 SSD Removable Cage M.2 NVMe 64G
- Option D-2: RW125-NVMe, 1x3.5" FDD to 1x2.5" SSD Removable Cage U.2 NVMe 32G
- Option D-3: RW125-12G, 1x3.5" FDD to 1x2.5" HotSwap Cage SATA/SAS 12G
- Option D-4: TL125-12G, 1x3.5" FDD to 1x2.5" TrayLess HotSwap Cage SATA/SAS 12G
- Option D-5: TL225, 1x3.5" FDD to 2x2.5" TrayLess HotSwap Cage SATA/SAS 12G
- Option E-1: RW135-12G, 1x5.25" to 1x3.5" HotSwap Cage SATA/SAS 12G
- Option E-2: TL135-12G, 1x5.25" to 1x3.5" TrayLess HotSwap Cage SATA/SAS 12G
- Option E-3: RW225-NVMe-U, 1x5.25" to 2xUSB3 2x2.5" SSD Removable Cage U.2 NVMe 32G
- Option E-4: RW225-NVMe, 1x5.25" to 2x2.5" SSD Removable Cage U.2 NVMe 32G
- Option E-5: RW225-12G, 1x5.25" to 2x2.5" HotSwap Cage SATA/SAS 12G
- Option E-6: RW625-12G, 1x5.25" to 6x2.5" HotSwap Cage SATA/SAS 12G
- Option E-7: RW825-1525, 1x5.25" to 8x2.5" HotSwap Cage SATA/SAS 6G
- Option E-8: RW425-NVMe, 1x5.25" to 4x2.5" SSD Removable Cage U.2 NVMe 32G
- Option E-9: RW425-12G-MS, 1x5.25" to 4x2.5" HotSwap Cage SFF-8643 12G
- Option E-10: RW425-12G, 1x5.25" to 4x2.5" HotSwap Cage SATA/SAS 12G
- Option E-11: RW425, 1x5.25" to 4x2.5" HotSwap Cage SATA/SAS 6G
- Option F-1: 1MSAS-4SATA-500MM, SFF-8087 Mini-SAS (Host) to Four SATA (Device) cable
- Option F-2: SFF-8643-500MM, SFF-8643 Mini-SAS HD (Host) to SFF-8643 Mini-SAS HD (Device) cable
- Option F-3: 4SATA-SFF-8643-500MM, Four SATA (Host) to SFF-8643 Mini-SAS HD (Device) cable
- Option F-4: SFF-8643-4SATA-500MM, SFF-8643 Mini-SAS HD (Host) to Four SATA (Device) cable
- Option G-1: 2U2011A-8080, 2U Intel LGA2011 LGA2066 active CPU cooler Square (2U 3U 4U chassis compatible)
- Option G-2: 2U2011A-5694, 2U Intel LGA2011 active CPU cooler Narrow (2U 3U 4U chassis compatible)
- Option G-3: 2U1150A, 2U Intel LGA115x Xeon 1230 active CPU cooler (2U 3U 4U chassis compatible)
- Option G-4: 2U4094A-SP3, 2U AMD EPYC LGA4094 active CPU cooler SP3 (2U 3U 4U chassis compatible)
- Option G-5: 2U1331A-AM4, 2U AMD LGA1331 active CPU cooler AM4 (2U 3U 4U chassis compatible)
- Option G-6: 2U3647A-S82, 2U Intel LGA3647 active CPU cooler Square (2U 3U 4U chassis compatible)
- Option G-7: 2U3647A-R82-1, 2U Intel LGA3647 active CPU cooler Narrow (2U 3U 4U chassis compatible)
- Option G-8: 2U4189A-M82, 2U Intel LGA4189 active CPU cooler (2U 3U 4U chassis compatible)
- Option G-9: 2U1700A-V15, 2U Intel LGA1700 active CPU cooler (2U 3U 4U chassis compatible)

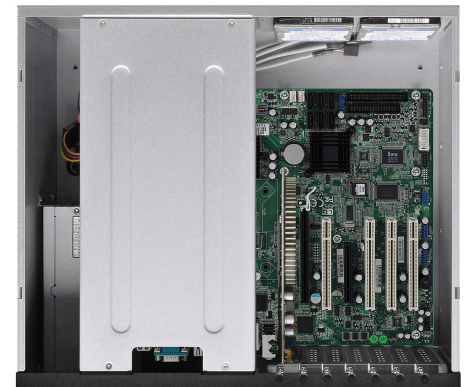

RW225-M2
1x3.5" FDD to 2 x M.2 SSD Removable Cage M.2 NVMe 64G

Latest updated on December 21, 2022

当社の書面許可しない場合に勝手に製品の設計、写真、規格説明など使っては禁止されております。 法律顧問: Guan-Rong Attorney-AT-LAW

Genesys Group Corporation copyright reserved © Without official document authorized by our company, any commercial behaviors including product design, photograph and specification description are prohibited. Website: www.genesysgroup.com.tw