


The era of Multi-core has been the main stream nowadays, one of the defining characteristics of C130B is the short depth at 300mm, it's also compatible with four 2.5" SSD or HDD which 7mm~15mm height compliant as well, it's also compatible for the latest 12Gb speed SFF-8643 SAS SSD. Maximum motherboard installable form factor is MicroATX 9.6" x 9.6" as well as Mini-ITX 6.7" x 6.7". The cooling system equipped with three 40mmx20mm silent fans and front bezel is equipped with quick release dust filter, effective dust-proof control and quick maintenance system environment. Combined a competitive advantage, welcome customers distribution all over the world.

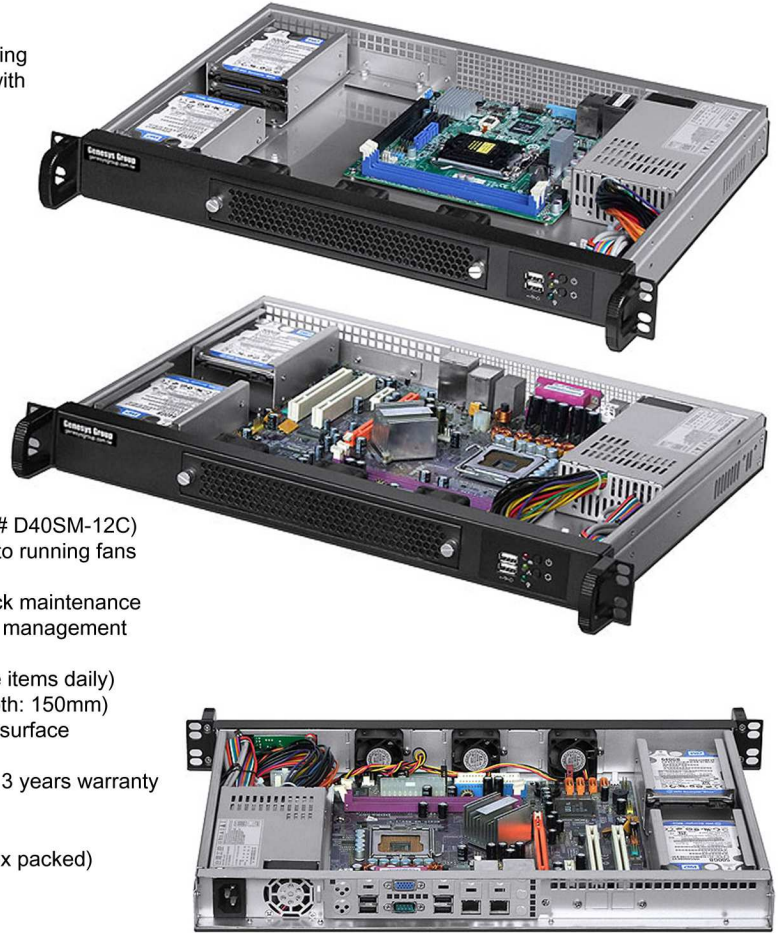

Specification

- * Drive capacity: four 2.5" HDD/SSD, 7mm~15mm height compatible
- * Two USB 2.0 ports at front bezel
- * Equipped with 3 brand new low noise 40mmx20mm intake fans (fan part# D40SM-12C)
- * Room noise without 3 fans activated is 41dBA, tested by 10cm distance to running fans is 65dBA (including room noise)
- * Equipped with quick release dust filter cover, effective dust control & quick maintenance
- * Equipped with 3pin fan wire PCB which simplified fan connectors routing management
- * Compatible motherboard: MicroATX(9.6"x9.6"), Mini-ITX(6.7"x6.7")
- * Various Genesys Group 1U I/O shield available (option, developing more items daily)
- * Support standard 1U FlexATX 250W~300W power supply (max. psu depth: 150mm)
- * SGCC sheet metal by 1.0mm~2.0mm thickness with protective sheet on surface
- * Standard paint: scratch-resistant black textured at front
- * Genesys Group branded server chassis model (with build-in fans) global 3 years warranty
- * Chassis dimension: 19" x 1U x 300mm (11.81" deep)
- * Accessory pack: M3 round head screw x17, #6 round head screw x17
- * Package: NW 4.0 KGM, GW 5.0 KGM, 1.09 CUFT (55x43x13cm, one box packed)

Ordering Information

- Model#: C130B, 1U black MicroATX server chassis
- Option A-1: EFAP-S250, 1U FlexATX 250W power supply with PFC (psu size 81.5 x 40.5 x 150/mm)
- Option A-2: ENP-7025B, 1U FlexATX 250W power supply with PFC (psu size 81.5 x 40.5 x 150/mm)
- Option A-3: ENP-7130B, 1U FlexATX 300W power supply with PFC (psu size 81.5 x 40.5 x 150/mm)
- Option B-1: NJ-600, 600mm 2-layer 3-travel universal slide rail (part# is 1 pair, cabinet internal depth 600~1200mm compliant)
- Option B-2: 1234U-RMK, 1234U rear mounting kit (part# is 1 pair)
- Option C: 1U active CPU Cooler, JB15C-8080 or JB15C-5694 LGA2011 or JB18A LGA1150/1155/1156/Xeon1230 active CPU cooler
- Option D: 1U SGCC non-paint I/O shield
- Option E: 1MSAS-4SATA-500MM, SFF-8087 Mini-SAS (Host) to Four SATA (Device) cable
- Option F: EMPL-G201-C1, Dual GLAN PCB module (available when Mini-ITX motherboard installed mode)



Latest updated on November 30, 2016