




Specification

- * Total drive bay: 2 x 5.25" ODD and 2 x 3.5" HDD bay
- * Drive bay equipped with anti-vibration function, extend storage appliance life
- * Front bezel equipped with two USB 2.0 ports behind the front keylock security door
- * Main structure of SGCC sheet metal thickness at 1.2mm with protective sheet on surface
- * Removable front door with security keylock and air filter function
- * Two Sunon EE80251B1-000C-G99 80mmx25mm intake fans behind the front bezel
- * MB: MicroATX(9.6"x9.6"), Mini-ITX(6.7"x6.7")
- * Support PS2 8cm or 12cm~14cm fan version psu (max. psu depth at 140mm~180mm)
- * If 140mm deep PS2 psu installed, max. 210mm deep 5.25" ODD device compatible
- * If 180mm deep PS2 psu installed, max. 170mm deep 5.25" ODD device compatible
- * If front fixed with 3.5" HDD, 4 slot low profile cards (max. depth at 170mm)
- * If front fixed w/o 3.5" HDD & bracket, 4 slot low profile cards (max. depth at 330mm)
- * Standard paint: black at front
- * Genesys Group branded server chassis model (with build-in fans) global 3 years warranty
- * chassis dimension: 19" x 2U x 380mm (14.96" deep)
- * Accessory pack: M3 round x 8pcs, #6 round x 20pcs, key x 2pcs
- * package: NW 5.5 KGM, GW 7.5 KGM, 1.72 CUFT (56x51x17cm, single box packed)



Ordering Information

- Model# : E238B, 2U black MicroATX enterprise server chassis
- Option A-0 : PS2 8cm or 12cm~14cm fan version power supply (max. psu depth at 140mm~180mm)
 - Option B-0 : NJ-600, 600mm 2-layer 3-travel universal slide rail , chassis depth at 600mm~1200mm compatible (part# is 1 pair)
 - Option B-1 : 1234U-RMK, 1234U rear mounting kit (part# is 1 pair)
 - Option C-0 : 25-35-BK, 5.25" 3.5" 2.5" multiple HDD bracket
 - Option D-0 : 2525TO3HDBK, 2x5.25" ODD space to 3x3.5" bracket
 - Option D-1 : RW425, 1x5.25" to 4x2.5" SAS/SATA Hot-Swap Cage
 - Option D-2 : RW825, 2x5.25" to 8x2.5" SAS/SATA Hot-Swap Cage
 - Option D-3 : RW335, 2x5.25" to 3x3.5" SAS/SATA Hot-Swap Cage
 - Option D-4 : TL335, 2x5.25" to 3x3.5" TrayLess SAS/SATA Hot-Swap Cage
 - Option D-5 : TL135, 1x5.25" to 1x3.5" TrayLess SAS/SATA Hot-Swap Cage
 - Option D-6 : RW135, 1x5.25" to 1x3.5" SAS/SATA Hot-Swap Cage

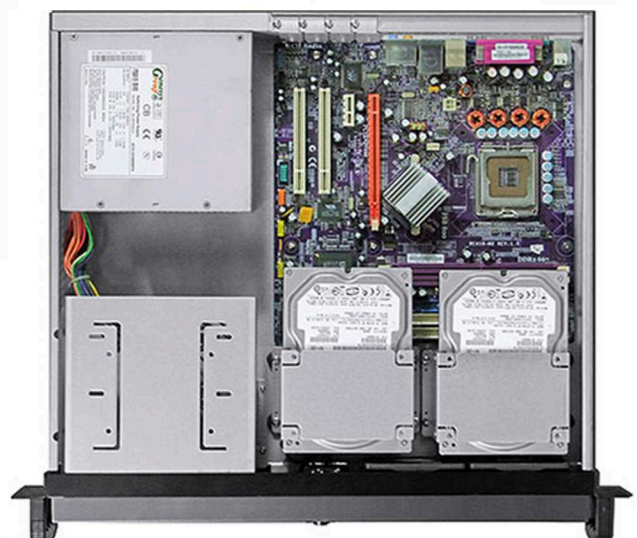

Latest updated on April 06, 2016