



Model# RW425-NVMe

Model name: 1x5.25" to 4x2.5" SSD Removable Cage U.2 NVMe 32G

- * One 5.25" space to four 2.5" NVMe U.2 mobile rack (some RAID cards/NVMe support hotswap but some don't)
- * 2.5" U.2 NVMe (32Gbps) SSD x4, with maximum height at 15mm compatible
- * Max. 32Gbps speed of each port, 32Gbps transfer speed can be 4GB/s if server's cooling system is excellent
- * Entire tray mechanism by high grade stainless with scratch-resistant black textured at front
- * Patented anti-vibration spring design, HDD can be mounted from bottom of removable HDD tray
- * 4 pairs of LED design: Left as Green power light, Right as Orange HDD access light
- * Two 40mmx20mm fans at rear as standard
- * Rear interface: Four SFF-8643 data transfer ports, 2x SATA 15pin psu input ports
- * Accessory Pack: M3 countersunk x16, M3 round x8, key x2
- * Global 3 years warranty or HDD removable cycle up to 50,000 times guaranteed
- * Product dimension: 159(L) x 145.8(W) x 41.6(H)mm
- * Package: N.W. 0.68 KGM, G.W. 1.18 KGM, CUFT 0.05 (195mm x 151mm x 46mm, single box packed)

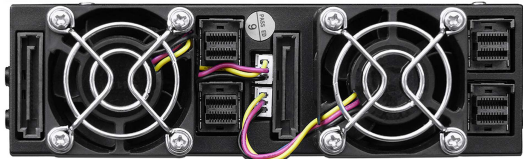


Four SFF-8643 data transfer ports




Model# RW425-12G-MS

Model name: 1x5.25" to 4x2.5" HotSwap Cage SFF-8643 12G

- * One 5.25" space to four 2.5" hotswap mobile rack (if RAID supported, extra RAID card required)
- * 2.5" SATA1/2/3/3.2/3.3 & SAS1/2/3 (12Gbps) HDD/SSD with maximum height at 15mm compatible
- * Entire tray mechanism by high grade stainless with scratch-resistant black textured at front
- * Patented anti-vibration spring design, HDD can be mounted from bottom of hotswap HDD tray
- * 4 pairs of LED design: Left as Green power light, Right as Orange HDD access light
- * Fan detect: if fan fail, the left Green power LED indicates slow flash red light
- * Temperature overheat: if over 60 degree-C, the left Green power LED indicates fast flash red light
- * Two 40mmx20mm fans at rear as standard
- * Rear interface: One SFF-8643 data transfer port, 1x SATA 15pin psu input port
- * Accessory Pack: M3 countersunk x16, M3 round x8, key x2
- * Global 3 years warranty or HDD hot swap cycle up to 50,000 times guaranteed
- * Product dimension: 159(L) x 145.8(W) x 41.6(H)mm
- * Package: N.W. 0.68 KGM, G.W. 1.18 KGM, CUFT 0.05 (195mm x 151mm x 46mm, single box packed)

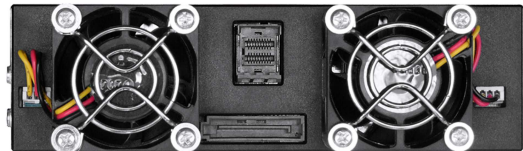

One SFF-8643 data transfer port

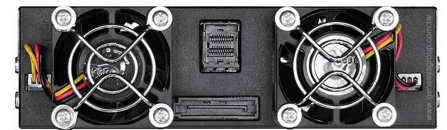

Model# RW425-12G

Model name: 1x5.25" to 4x2.5" HotSwap Cage SATA/SAS 12G

- * One 5.25" space to four 2.5" hotswap mobile rack (if RAID supported, extra RAID card required)
- * 2.5" SATA1/2/3/3.2/3.3 & SAS1/2/3 SAS 12G or SAS/SATA 6G SSD/HDD with max. 15mm height compatible
- * Entire tray mechanism by high grade stainless with scratch-resistant black textured at front
- * Patented anti-vibration spring design, HDD can be mounted from bottom of hotswap HDD tray
- * 4 pairs of LED design: Left as Green power light, Right as Orange HDD access light
- * Fan detect: if fan fail, the left Green power LED indicates slow flash red light (option)
- * Temperature overheat: if over 60 degree-C, the left Green power LED indicates fast flash red light (option)
- * One 40mmx20mm fan at rear as standard
- * Rear interface: 4x SATA 7pin data transfer port, 1x SATA 15pin psu input port
- * Accessory Pack: M3 countersunk x16, M3 round x8, key x2
- * Global 3 years warranty or HDD hot swap cycle up to 50,000 times guaranteed
- * Product dimension: 159(L) x 145.8(W) x 41.6(H)mm
- * Package: N.W. 0.68 KGM, G.W. 1.18 KGM, CUFT 0.05 (195mm x 151mm x 46mm, single box packed)



Four SATA 7pin data transfer ports



Latest updated on November 11, 2024