

The most prominent feature of S208B-eATX is the short depth at 624mm, compatible with 8 sets of 3.5" hotswap drives as well as 2 sets of 2.5" internal hard drive space, excellent matching and application of RAID controller card installed to comply with this storage server in the cloud environment. A large number and variety of choice of hard disk access space, front and rear symmetrical bodies patented design can also enhance the system integration flexibility and overall strength, the whole bodies do not skew or distort to achieve robust and ensure the security and stability of the system. Cooling as standard three Sunon 80mm x 25mm 2ball bearing fans (80mm x 38mm 2ball fans as option) as effective cooling system, combines the advantages of multi-functional and competitive price, welcome worldwide distribution.

### Specification


- \* Two internal 2.5" SSD/HDD bay: 7mm~15mm height of 2.5" HDD/SSD compatible
- \* Eight hotswap 3.5" HDD bay (eight hotswap 2.5" HDD/SSD also compatible): SATA1/2/3/3.2/3.3 (6G) & SAS1/2 (6G) HDD, max. 25.4mm height of HDD compatible or SAS1/2/3 (12G) HDD, max. 26.1mm height of HDD compatible (RAID card required)
- \* Mobile rack Left LED: Green power LED
- \* Mobile rack Right LED: Blue access LED (solid Red light if HDD temp over 60-degree C)
- \* Stainless & Hair surface proceeded mobile rack structure with security keylock
- \* Two Hotswap 6G SFF-8087 backplanes: 1 to 4port MiniSAS connector (S208B-eATX)
- \* Two Hotswap 12G SFF-8643 backplanes: 1 to 4port MiniSAS HD connector (S208B-eATX-12G)
- \* Front bezel equipped with two USB 2.0 ports
- \* Three EasySwap Sunon 80mmx25mm 2ball fans (three 80mmx38mm fans as option)
- \* Room noise at 49dBA, tested by 10cm distance to running fans is 60dBA (including room noise)
- \* Compatible MB: eATX EEB3.61 (12"x13"), CEB1.01 (12"x10.5"), ATX (12"x9.6")
- \* Compatible with Zippy P2G-5600V, 2U 600W PSU size at 240x100x70mm
- \* Compatible with Zippy P2G-5650G, 2U 650W PSU size at 240x100x70mm
- \* Compatible with SureStar SS-2U70EL, 2U 700W PSU size at 225x100x70mm
- \* Compatible with Zippy P2M-5800V, 2U 800W PSU size at 280x100x70mm
- \* Compatible with SureStar R2A-700D1V2, 2U 700W RPS size at 265x101x84mm
- \* Compatible with Zippy G1W2-5760V2V, 2U 760W RPS size at 300x101.2x84mm
- \* Compatible with 7-slot Low profile expansion cards at maximum 340mm deep
- \* Major sheet metal by SGCC 1.2mm~2.0mm thickness with no burr & sharp corner design
- \* Patented front/rear symmetrical body design makes system flexibility & durable strength
- \* Standard paint: scratch-resistant Black textured at front
- \* Genesys Group branded server chassis in global 3 years warranty
- \* Chassis dimension: 19" x 2U x 624mm (24.57" deep)
- \* Accessory pack: M3 x8, #6 x4, #6 truss x15, MB 5mm high stud x11, keyx2, HDD kit x1
- \* Package: NW 10 KGM, GW 12 KGM, 3.11 CUFT (76x58x20cm, one box packed)

### Ordering Information


- Model#: S208B-eATX, 2U eATX 6G hotswap symmetrical server chassis (6G version and three 80mmx25mm fans)  
 Model#: S208B-eATX-8038, 2U eATX 6G hotswap symmetrical server chassis (6G version and three 80mmx38mm fans)  
 Model#: S208B-eATX-12G, 2U eATX 12G hotswap symmetrical server chassis (12G version and three 80mmx25mm fans)  
 Model#: S208B-eATX-12G-8038, 2U eATX 12G hotswap symmetrical server chassis (12G version and three 80mmx38mm fans)  
 Option A-1: Zippy P2G-5600V, 2U 600W PSU size at 240x100x70mm  
 Option A-2: Zippy P2G-5650G, 2U 650W PSU size at 240x100x70mm  
 Option A-3: SureStar SS-2U70EL, 2U 700W PSU size at 225x100x70mm  
 Option A-4: Zippy P2M-5800V, 2U 800W PSU size at 280x100x70mm  
 Option A-5: SureStar R2A-700D1V2, 2U 700W RPS size at 265x101x84mm  
 Option A-6: Zippy G1W2-5760V2V, 2U 760W RPS size at 300x101.2x84mm  
 Option B-1: NJ-S628, 628mm 3-travel slimline slide rail (part# is 1 pair, compatible cabinet external depth 700~1000mm)  
 Option B-2: SRMK-550, 550mm Slimline rear mounting kit (part# is 1 pair)  
 Option C-1: 4SATA-1MSAS-500MM, Four SATA (Host) to SFF-8087 Mini-SAS (Device) cable  
 Option C-2: 1MSAS-1MSAS-500MM, SFF-8087 Mini-SAS (Host) to Mini-SAS (Device) cable  
 Option C-3: SFF-8643-500MM, SFF-8643 Mini-SAS HD (Host) to SFF-8643 Mini-SAS HD (Device) cable 12G  
 Option C-4: 4SATA-SFF-8643-500MM, Four SATA (Host) to SFF-8643 Mini-SAS HD (Device) cable 12G  
 Option D-1: 2U2011A-8080, 2U Intel LGA2011 active CPU cooler Square (2U 3U 4U chassis compatible)  
 Option D-2: 2U2011A-5694, 2U Intel LGA2011 active CPU cooler Narrow (2U 3U 4U chassis compatible)



Three 80mm x 25mm Sunon 2ball bearing fans

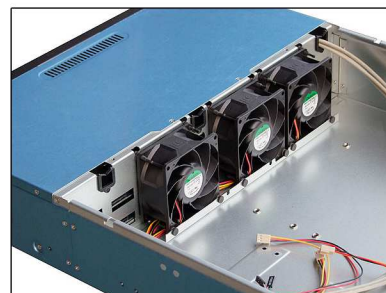

Three 80mm x 38mm Sunon 2ball bearing fans

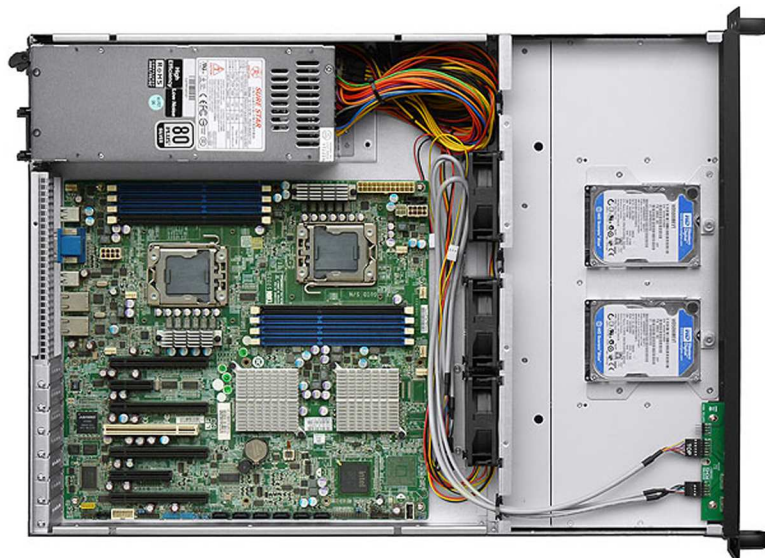

Latest updated on October 03, 2018